

Sunvolley® 'Standard'

beach volleyball unit

Assembly instructions



for prod. code 11 117 89f

Thank you very much for choosing a Sport-Thieme product!

Please read the instructions fully before you assemble the equipment so you can enjoy the product and safety is guaranteed.

We are happy to respond to your questions and requests.

Included:

1 bag
1 net

1 border marking (9 m x 18 m) (only with complete system!)

2 middle posts sections (ø 3.5 cm)

2 lower post sections (ø 4 cm) with 5 holes for height adjustment

1 upper post section (ø 4 cm) with Clamcleat

1 upper post section (ø 4 cm) without Clamcleat

2 ground plate for posts

4 pegs for posts

Assembly instructions

The system is suitable for use on grass. On sand, sand anchors should be used instead of pegs. A special sand kit is available from SUNVOLLEY. Whilst it is of course easier and faster to set up the outdoor volleyball system with 2 or more people, it can also be assembled by one person only.




Marking the court (9 m x 18 m)

1. You can start at any point as the rope length between pegs is always 9 m.

Placing the posts

2. Take one post part - no matter which one, they are all 1 m long - and lay it in the middle of a court's long side at an right angle to the outside. At the end of the post section, push a base plate into the ground. Do the same with the second base plate on the other long side of the court.


3. Put the post parts together as shown. Fix the desired height on the lower post parts. Maximum height for men.

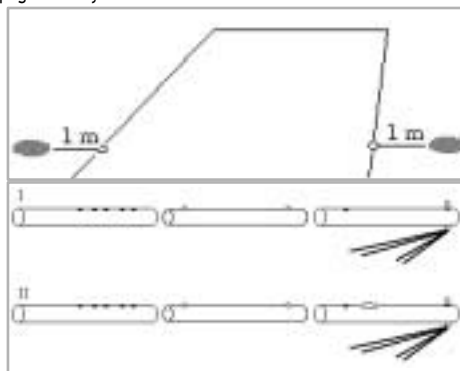

SPORT-THIEME®

Sport-Thieme GmbH – 38367 Grasleben / Germany – www.sport-thieme.com

Tel. +49 (0) 53 57-181 81 – Fax +49 (0)53 57-18190 – info@sport-thieme.com

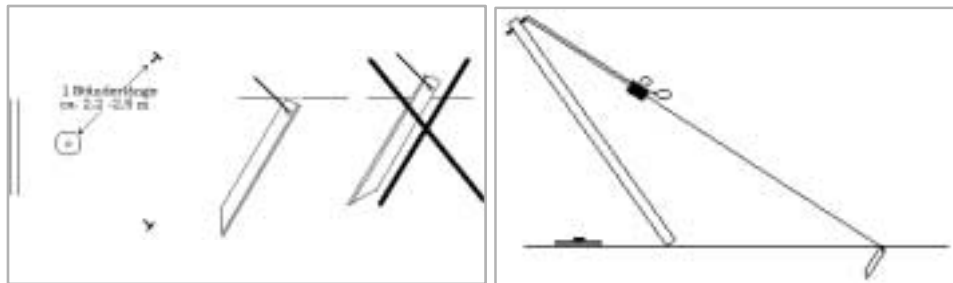

4. Place the posts next to the base plate. Hammer the pegs approx. one post section length from the base disc and roughly as shown into the ground. Hammer the pegs completely into the ground to prevent injuries from protruding parts. Only completely sunk pegs guarantee optimum anchoring.
5. Feed the post cord into the integrated Clamcleat. Place the post - not yet on the base - at an angle, so you can feed in the net cords comfortably later on.
6. Do the same with post II.

Attaching and tensioning the net

7. Open the net. Place the net between the two posts on the ground in such way that the net end with the loop is next to post I.
8. Attach the loop the snap hook on post I.
9. Go to post II. Feed the upper net cord (red) into the ring of post II. Fix the cord loosely in the Clamcleat. Guide the upper net cord (yellow) around the post and fix it loosely in the Clamcleat.
10. Place the post onto the base plate. Tension the post cords in such way that the two posts are straight. Make sure, the post cords do not cross on the ring.
11. Pull the long net cord hard to tension the cord and fix it in the Clamcleat. Check again that the posts are vertical.
12. Guide the bottom net side cords (yellow) around the post. Tension these cords using the integrated Clamcleats to tension the net tautly.
13. Tension the upper side cords (yellow) as well. Ensure that the net is at roughly the same distance from both posts.
14. After playing for a while, check the net's tensioning and the pegs' position in the ground. Re-tension if necessary.

Disassembly and packing the bag

- Clean pegs after use and store them in the lower post sections.
- First, put the post sections in the bag.
- Place the two base plates upright at the bag's two ends.
- Fold net neatly after use and put it in the bag.
- It is possible to put a hammer in the bag.